

RCU09 Built-in receiver motor/2-button operation

The RCU09 built-in receiver serves to open and close roller shutters.

It can be controlled using up to 32 hand transmitters or wall switches (2-button operation) and switches off automatically after a maximum of 90 seconds.

The devices can be installed in suspended ceilings as well as in raised floors.



RCU09E5002-01-03K


Technical specifications

Coding	Easywave Up to 32 transmitters can be programmed.
Frequency	868.30 MHz
Channels	1
Power supply	230 V AC, 50 Hz
Power consumption	1.0 W standby 1.0 W relay switched (without load)
Operating modes	UP/DOWN (2-button operation, stop with the opposite direction button) DEADMAN (maximum 36 seconds)
Outputs	2 relay contacts (normally open)
Maximum contact load	
- ohmic load $\cos\phi = 1.0$	2.5 A / 575 VA
- inductive load $\cos\phi = 0.8$	2.0 A / 460 VA
Operating temperature	0 °C to +40 °C
Dimensions	210 x 45 x 32 mm

Wiring diagram

Scope of delivery

- Built-in receiver
- Operating manual

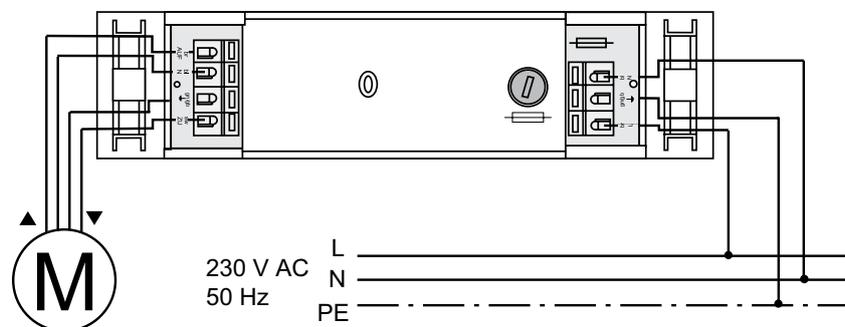

Models

Product numbers	Description
RCU09E5002-01-03K	Built-in receiver 1-channel, motor/2-button operation