

RCJ01 Flush-mounted receiver 230 V

This RCJ01 flush-mounted receiver is designed to directly switch mains voltage devices on and off when in the ON/OFF (1- or 2-button operation) or TIMER operating modes.

With its compact dimensions, the RCJ01 can fit into all standard flush-mounted boxes. Up to 32 transmitters can be programmed into the receiver's memory, ensuring that complex control tasks can be solved easily without taking up unnecessary space.

The programming itself is very simple and is carried out by pressing a button directly on the device.




RCJ01E5001-01-23K

Technical specifications

Coding	Easywave Up to 32 transmitters can be programmed.
Frequency	868.30 MHz
Channels	1
Power supply	230 V AC, 50 Hz
Power consumption	1.2 W standby 1.2 W relay switched (without load)
Operating modes	ON/OFF (2-button operation) ON/OFF (1-button operation) TIMER (7 minutes, retriggerable)
Outputs	1 relay contact (normally open)
Maximum contact load	
- ohmic load	10.0 A / 2,300 VA
- inductive load	2.6 A / 600 VA
- non- or serial-compensated fluorescent lamps	10.0 A / 2,300 VA
- parallel-compensated fluorescent lamps	2.6 A / 600 VA
- electronic ballast capacity	4.0 A / 920 VA
Operating temperature	-20 °C to +60 °C
Dimensions	46 x 46 x 25 mm

Wiring diagram

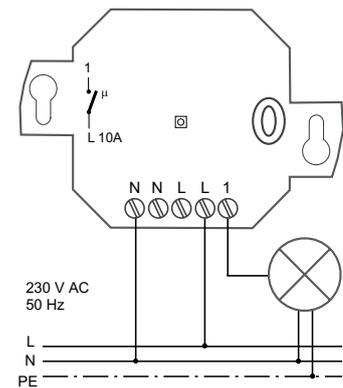

Scope of delivery

- Flush-mounted receiver
- Operating manual

Models

Product numbers	Description
RCJ01E5001-01-23K	Flush-mounted receiver 1-channel , 230 V