



Transmit



Recieve



Decode



Control

Multi Channel Transmitter RT22 Baseline

Of the Multi Channel Transmitter RT22 three different models are available:

52-channel-model: Up to 52 devices can be controlled and 4 different levels each containing 13 individually coded radio channels are provided.

999-channel-model (impulse mode): Up to 999 devices can be selected by a numerical code. The transmission is activated by pressing ENTER. With the buttons A to D it is possible to switch one device each directly.

999-channel-model (awning mode): Up to 999 devices can be selected by a numerical code. It can then be controlled by pressing UP/STOP/DOWN. With the buttons A to D it is possible to switch one device each directly.



RT22-XX39M-01

Technical Details

Coding	factory coding with over 70 million options, code duplication by the user is possible
Channels	52 or 999
Range	up to 150 m under favourable open field conditions
Power Supply	2x 3V battery, CR2032
Operation Indicator	4 LED's
Degree of Protection	IP54
Operating Temperature	-20 °C to +60 °C
Dimensions	150 x 60 x 22 mm
Weight	100 g (including battery)

Accessories




RT22-ACC-01



ACC-CAB-11

Models

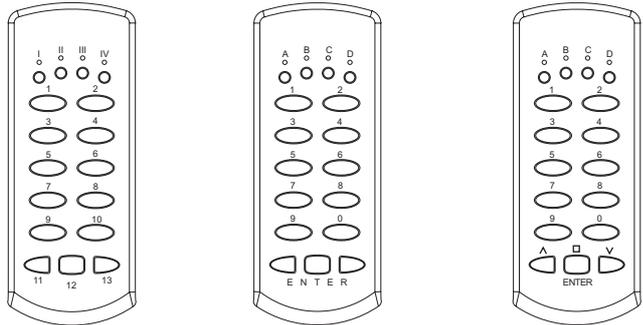

Scope of Delivery

- Multi Channel Transmitter incl. battery
- Mounting Plate
- Programming Cable
- Operating Manual

Accessories (optional)

- Mounting Plate
- Programming Cable
- Battery

Product Key

52 Channels (pulse)	999 Channels (pulse)	999 Channels (direction)
on request	RT22-3139M-01	on request
RT22-4125M-01	RT22-4139M-01	RT22-4139M-02
RT22-5025M-01	RT22-5039M-01	RT22-5039M-02
on request	on request	on request

Description

Frequency

RT22-ACC-01	Mounting Plate	315 MHz
ACC-CAB-11	Programming Cable	433,92 MHz
ACC-BAT-05	Battery CR2032	868,30 MHz
		916,50 MHz