

RCU10 Built-in receiver 230V

This RCU10 built-in receiver is designed to switch mains voltage devices on an off when in the ON/OFF or TIMER operating modes.

The RCU10 can be controlled with up to 32 Easy-wave hand transmitters and Easywave wall switches.

The devices can be installed in suspended ceilings, lights as well as in raised floors.




RCU10E5001-01-03K

Technical specifications

Coding	Easywave Up to 32 transmitters can be programmed.
Frequency	868.30 MHz
Channels	1
Power supply	230 V AC, 50 Hz
Power consumption	1.0 W standby 1.0 W relay switched (without load)
Operating modes	ON/OFF (2-button operation) ON/OFF (1-button operation) TIMER (7 minutes, retriggerable)
Outputs	1 relay contact (normally open)
Maximum contact load	
- ohmic load $\cos\phi = 1.0$	16.0 A / 3,680 VA
- inductive load $\cos\phi = 0.8$	6.4 A / 1,472 VA
Operating temperature	0 °C to +40 °C
Dimensions	210 x 45 x 32 mm

Wiring diagram

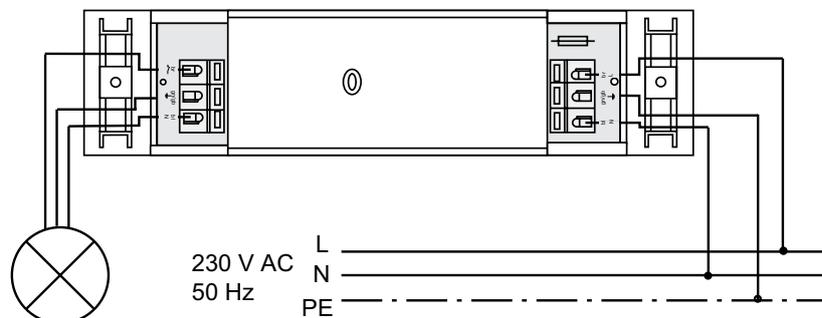

Scope of delivery

- Built-in receiver
- Operating manual

Models

Product numbers	Description
RCU10E5001-01-03K	Built-in receiver 1-channel, 230 V