

RCJ02 Flush-mounted receiver with time switch

The RCJ02 flush-mounted receiver is a mains-operated radio receiver equipped with a time switch. It is designed to be mounted in standard switch boxes.

Besides switching devices on and off according to a timer, the RCJ02 is also able to control the brightness of a roller shutter system in connection with the SL01 light sensor. Up to 50 switching times can be programmed into the receiver's memory for a switching period of 24 weeks (daily function) or seven days (weekly function).

Up to 36 additional transmitters can be programmed into the receiver's memory, allowing for larger user groups to be managed.




RCJ02E5002-01-02K

Technical specifications

Coding	Easywave Up to 36 transmitters can be programmed.
Frequency	868.30 MHz
Channels	1
Power supply	230 V AC, 50 Hz
Power consumption	1.5 W standby 1.7 W relay switched (without load)
Operating modes	UP/STOP/DOWN
Outputs	2 relay contacts (normally open)
Maximum contact load	
- ohmic load $\cos\phi = 1.0$	4.0 A / 920 VA
- inductive load $\cos\phi = 0.8$	3.2 A / 736 VA
Operating temperature	0 °C to +50 °C
Dimensions	80 x 80 x 45 mm
Color	white similar to RAL 9003

Wiring diagram

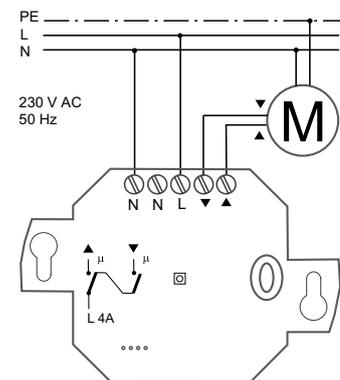

Scope of delivery

- Flush-mounted receiver with time switch
- Mounting kit
- Operating manual

Accessories (optional)

SL01E5001-01-01K Light sensor, white



SL01E5001-01-01K

Models

Product numbers	Description
RCJ02E5002-01-02K	Flush-mounted receiver 1-channel, with time switch, white