


**Model**



**Safety Advice**

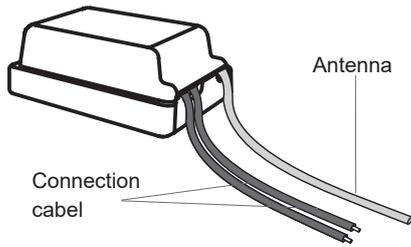

Before connecting the transmitter, carefully read through the operating instructions!


- We will not accept any liability for personal injury or damage to property caused by failure to observe the operating instructions and in particular the safety advice!!
- **Caution!** Mount and connect the transmitter in accordance with the safety regulations, standards and guidelines specific for the purpose of use!
- Note also the operating instructions of the voltage supplying device.
- Have faulty transmitters checked by the manufacturer!
- Do not make any unauthorized alterations or modifications to the transmitter!
- Do not damage the insulation of the wires!
- **Caution!** The length of the aerial may not be altered!

**Function**

The RTS17 Built-In Transmitter is A-coded. As long as it is connected to voltage, but maximally for a duration of 10 seconds, an A-coded radiogram is transmitted. This way a device can be switched by radio control.

**Start-Up**

1. Connect the transmitter via the blue cables to a switched voltage supply.

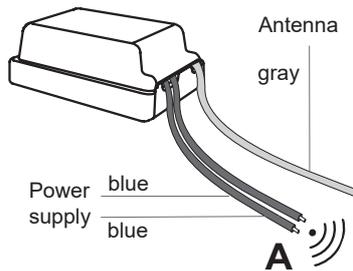

2. Transfer the transmission code to the radio controls of the device to be operated. For this read the operating instructions supplied with the radio control.



Make sure there is no interference with the wireless connection. Do not mount the device in a distribution box, in metal casings, in direct proximity to large metal objects, on the floor or close to it.

**Disposal**

**Waste electrical products and batteries not be disposed of with household waste!**

Dispose of the waste product via a collection point for electronic scrap or via your specialist dealer.

Dispose of used batteries in a recycling bin for batteries or via the specialist trade. Put the packaging material into the recycling bins for cardboard, paper and plastics.



**Warranty**

Within the statutory warranty period we undertake to rectify free of charge by repair or replacement any product defects arising from material or production faults.

Any unauthorized tampering with, or modifications to, the product shall render this warranty null and void.

**Conformity**



Hereby, ELDAT EaS GmbH declares that the radio equipment type RTS17 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: [www.eldat.de](http://www.eldat.de)

**Service**

If, despite correct handling, faults or malfunctions occur or if the product was damaged, please contact your retailer or the manufacturer.

**ELDAT EaS GmbH**

Schmiedestraße 2  
15745 Wildau  
Germany  
Phone: + 49 (0) 33 75 / 90 37-310  
Fax: + 49 (0) 33 75 / 90 37-90  
Internet: [www.eldat.de](http://www.eldat.de)  
E-Mail: [info@eldat.de](mailto:info@eldat.de)

**RTS17E5001A01**

**Technical Details**

Frequency:	868.30 MHz ± 40 kHz
Radiated power:	0.33 mW
Modulation:	FSK
Range:	Free field: approx. 150 m Buildings: approx. 30 m
Power Supply:	5V-24 VAC 50 Hz 6V-32 VDC
Transmitting Current:	approx. 11 mA
Operating Temperature:	-20 °C to +60 °C
Dimensions (B/L/H):	18/26,5/12 mm without cable
Weight:	approx. 5 g

**Scope of Delivery**

Built-In Transmitter RTS17, Operating instruction

**Intended Use**

The Built-In transmitter may only be used to transmit telegrams to switch a device. It may only be connected to a 5V to 24 VAC or a 6V to 32VDC power supply.

The manufacturer shall not be liable for any damage caused by improper or non-intended use.