

RT32 Hand transmitter

UP/STOP/DOWN



The RT32 hand transmitter has been specially designed to control roller shutters, blinds and awnings.

The UP/STOP/DOWN operating mode can be used in combination with the appropriate Easywave receiver.

By using the group function, it is possible to control all connected radio receivers at the press of a single button.




RT32E5004-01-02K

RT32E5001-01-22K


Technical specifications

Coding	Easywave
Frequency	868.30 MHz
Channels	1 or 4
Range	typically 150 m in good free-field conditions
Power supply	1x 3V-battery, CR2032
Operating indicator	LED(s)
Operation	transmission lasts as long as the button is pressed (maximum 36 seconds)
Operating temperature	-20 °C to +60 °C
Dimensions (W/L/H)	38/109/14 mm (without mounting plate)
Weight	37 g (including battery)
Color	glossy white similar RAL 9003 glossy black similar RAL 9005

Models

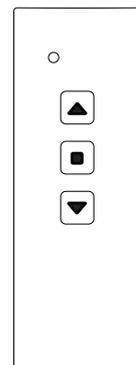

RT32E5001-01-xxK
1x UP/STOP/DOWN

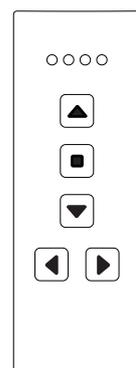

RT32E5004-01-xxK
4x UP/STOP/DOWN

Scope of delivery

- Hand transmitter incl. battery
- Mounting plate
- Adhesive pad
- Operating manual

Accessories (optional)

RT32-ACC-01-02P	Mounting plate, glossy white
RT32-ACC-01-22P	Mounting plate, glossy black



RT32-ACC-01-02P



RT32-ACC-01-22P

Models

Product number	Description
RT32E5001-01-02K	Hand transmitter, Easywave, 1x UP/STOP/DOWN, glossy white
RT32E5001-01-22K	Hand transmitter, Easywave, 1x UP/STOP/DOWN, glossy black
RT32E5004-01-02K	Hand transmitter, Easywave, 4x UP/STOP/DOWN, group function, glossy white
RT32E5004-01-22K	Hand transmitter, Easywave, 4x UP/STOP/DOWN, group function, glossy black