

RTS41 Surface-mounted transmitter

Telephone call forwarding



The RTS41 stationary transmitter is used to forward an analogue telephone call signal to an external Easywave receiver, such as RCP24, RCP25 or RCJ32.

When a call is received, the RTS41 transmits a radio signal to an Easywave receiver and switches the receiver according to the selected operating mode.




RTS41E5001-01-01K

Technical specifications

Coding	Easywave
Frequency	868.30 MHz
Channels	1
Range	typically 150 m in good free-field conditions
Power supply	via the ringing voltage of a telephone line
Operation	by telephone call
Function	forwarding an analogue telephone call signal
Operating temperature	-20°C to +60°C
Dimensions (W/L/H)	70/64/35 mm
Weight	32 g
Color	white similar RAL 9003

Scope of delivery

- Surface-mounted transmitter
- RJ11/RJ11 connection cable (length 54 cm)
- TAE-N/RJ11 adapter
- Mounting material
- Operating manual

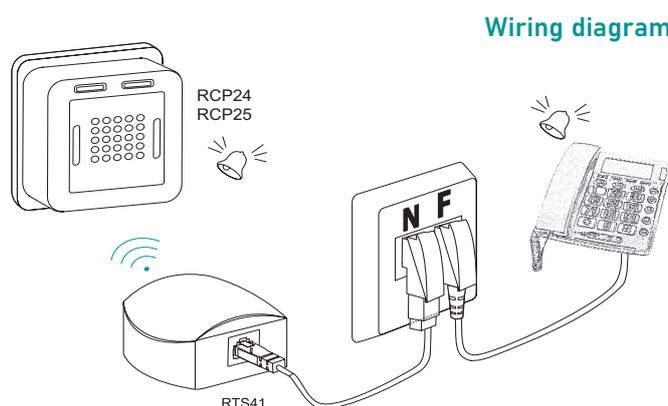

Models

Product number	Description
RTS41E5001-01-01K	Surface-mounted transmitter, Easywave, 1x PULSE, telephone call forwarding, TAE-N, white